

LED Beacons FD24

ECE R65 TA1, approved.

Double waterproof designed to meets IP68.

LED ECO energy-saving design.

4 kinds of installation (Flexi Din, Magnetic, Single Point ,3 Point)

Lampshade is made of PC, strong tooth structure and stylish design.

Operating Voltage 10-30V, Operating temperature -30°C - 70°C .

Maximum power 24W.



8 kinds of flash modes (including rotating).

Multiple products can be synchronized.





Mounting

080601(color)T




3 Point

080601(color)M




Magnetic

080601(color)F

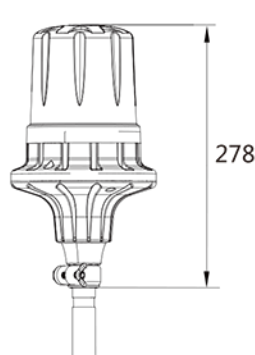



Flexi Din

080601(color)S



Single Point

Wiring

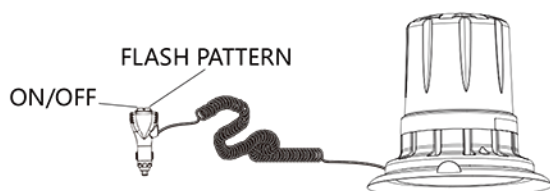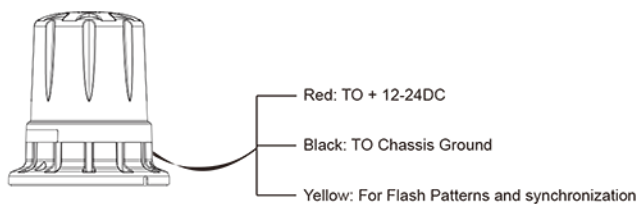

Magnetic mount have a cigarette lighter with coil cord.

Flash Patterns

1. ECE R65 120FPM single (all)
2. ECE R65 120FPM Double (all)
3. ECE R65 120FPM Rotator (all)
4. 75FPM Slow rotation (all)
5. 75FPM Quad (all)
6. ECE R65 120FPM single (Split)
7. ECE R65 120FPM Double (Split)
8. 75FPM Quad (Split)

Flash Pattern: the YELLOW line to + VDC

- Less than 1 second for the NEXT pattern.

- More than 5 seconds for the first pattern.

Synchronization (Except Magnetic Mount):

To sync two beacons, with the power off, connect the YELLOW wires from each beacon together. Power on and take the YELLOW wires to +VDC 5 seconds for the first pattern. Now, their patterns will be synchronized.