




F3S / F6S

TECHNICAL SPECIFICATIONS

Model	F3S		F6S	
	Item	023801	023901	023902
Color	Single	Split	Single/Split	Dual
Voltage	DC 10-33V			
Max Power	9W		18W	9W
LED	6pcs 3W		12pcs 3W	
LENS	TIR			
Flash Patterns	19		19	12
Mount	3M Adhesive or Cover			
Operating Temperature	-30 to 70°C			
Certification	SAE J595 I, CA T13, ECE R65 I, R10 SAE J595 I, CA T13, ECE R65 II, R10			


MOUNT- F3S

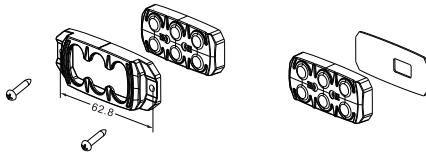

Mount with a cover

Mount with 3M

MOUNT- F6S

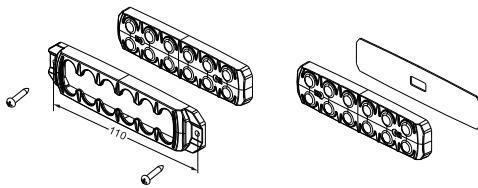

Mount with a cover

Mount with 3M

WIRING-F3S

Single/Split Color

- RED** — For power supply to 10-33VDC
- BLACK** — GND
- YELLOW** — Synchronization, flash pattern selection and reset
 - Connect YELLOW wires of all heads together for synchronization
 - To change flash patterns, apply +VDC for less than 1 second and release
 - Flash patterns will be reset when YELLOW wires are connected to RED wire for more than 5 seconds
- WHITE** — Alternation

With the power off, connect the wire from one lighthouse to +VDC and leave the other unconnected. Their patterns will alternate when the lighthoods are activated.

WIRING-F6S

Single/Split Color

- RED** — For power supply to 10-33VDC
 - BLACK** — GND
 - GREEN** — 50% Power
 - YELLOW** — Synchronization, flash pattern selection and reset
 - Connect YELLOW wires of all heads together for synchronization
 - To change flash patterns, apply +VDC for less than 1 second and release
 - Flash patterns will be reset when YELLOW wires are connected to RED wire for more than 5 seconds
 - WHITE** — Alternation
- With the power off, connect the wire from one lighthouse to +VDC and leave the other unconnected. Their patterns will alternate when the lighthoods are activated.

Dual Color

- BROWN** — Color 1 “+”
- RED** — Color 2 “+”
- GREEN** — 50% Power
- BLACK** — GND
- YELLOW** — For synchronization, flash pattern selection and reset
- WHITE** — Alternation

FLASH PATTERNS

F3S

1	Random (Default)	11	Single (All)
2	Single (Split)	12	Double (All)
3	Double (Split)	13	Quad (All)
4	Quad (Split)	14	Quint (All)
5	Quint (Split)	15	Ultra (All)
6	Ultra (Split)	16	Single-Quad (All)
7	Single-Quad (Split)	17	Single-H/L (All)
8	Single-H/L (Split)	18	Steady 2 (California)
9	ECE R65 Single (All)	19	Steady 4 (All)
10	ECE R65 Double (All)		

F6S

Single/Split Color

1	Random (Default)
2	Single (Split)
3	Double (Split)
4	Quad (Split)
5	Quint (Split)
6	Ultra (Split)
7	Single-Quad (Split)
8	Single-H/L (Split)
9	ECE R65 Single (All)
10	ECE R65 Double (All)
11	Single (All)
12	Double (All)
13	Quad (All)
14	Quint (All)
15	Ultra (All)
16	Single-Quad (All)
17	Single-H/L (All)
18	Steady 2 (California)
19	Steady 4 (All)

Dual Color

1	Steady 2 (Default)
2	Steady 4 (All)
3	Random (All)
4	ECE R65 Single (All)
5	ECE R65 Double (All)
6	Single (All)
7	Double (All)
8	Quad (All)
9	Quint (All)
10	Ultra (All)
11	Single-Quad (All)
12	Single-H/L (All)

911 Signal Technology Inc.

Add:Room 701-702,Hengwei Building,No.258, Tiangao Lane, Shounan Subdistrict, Yinzhou Area, Ningbo City, Zhejiang, China.

Tel: +86 574 89017911 +86 400 6757911

Fax: +86 574 82822560

Email: sales@911signal.com

Website: www.911signal.com