




F6S

Features

- > SAE J595 I, CA T13, ECE R65 II, R10
- > Low profile with a robust structure and an artistic look
- > Utilizes two rows of LEDs with 12 high-intensity diodes for superior warning effects
- > Compact design offers multiple mounting locations
- > Super fast installation with 3M adhesive or an optional bezel
- > Fully encapsulated for moisture, vibration and corrosion resistance
- > Synchronization capability
- > IP69K rated

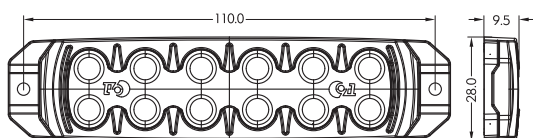

Single Color

Item	Color	Voltage	Max Power	Lens	LED	Flash Patterns	Operating Temperature	Mounting
023901	 	10-33VDC	18W	TIR	12pcs 3W	19	-30 to 70°C	3M Adhesive or Cover

Split Color

Item	Color	Voltage	Max Power	Lens	LED	Flash Patterns	Operating Temperature	Mounting
023901	 	10-33VDC	18W	TIR	12pcs 3W	19	-30 to 70°C	3M Adhesive or Cover

Dual Color

Item	Color	Voltage	Max Power	Lens	LED	Flash Patterns	Operating Temperature	Mounting
023902	 	10-33VDC	9W	TIR	12pcs 3W	12	-30 to 70°C	3M Adhesive or Cover

911 Signal Technology Inc.

China Office
 Tel: +86-574-89017911
 Fax: +86-574-82822560
 Email: sales@911signal.com

France Office
 Tel: +33(0)659163209
 Email: euoffice@911signalgroup.com
 www.911signal.com

