

INSTALLATION INSTRUCTIONS

- Clean and simple look.
 - Working under 10-33V DC.
 - Base Diameter Reaches 180mm
 - Aluminium Alloy Facilitates Heat Dissipation
 - Multiple Mounting Options Fulfilling Different Needs
 - Three mounts. Three-point mount, magnetic mount, single point mount.
 - ECE R65 ; ECE R10 ; SAE J845 ;
 - 11 flash patterns.
-


CONDUCTOR LED Beacons

Item:081001

www.911signal.com




WIRING

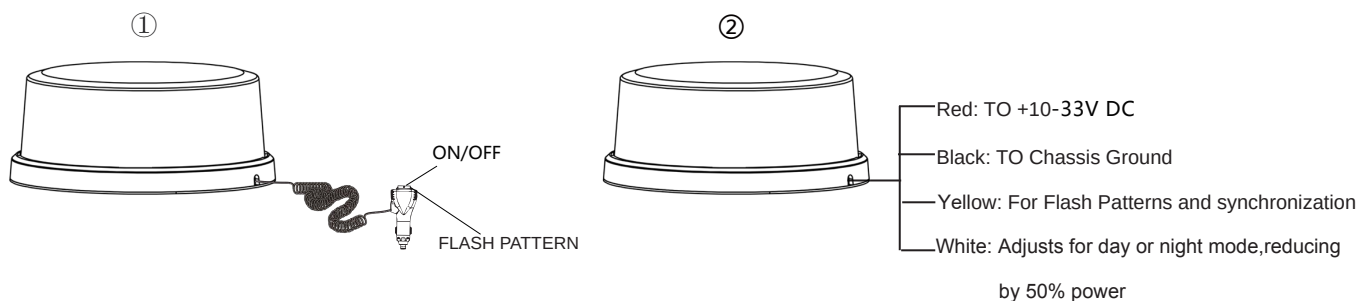



NOTE:
DC 12V Max Power 21W ; DC 24V Max Power 32W

FLASH PATTERNS

- 1.ECE R65 120FPM Single (all)
- 2.ECE R65 120FPM Double (all)
- 3.ECE R65 120FPM Rotator (all)
- 4.75FPM Rotation (all)
- 5.Single (all)
- 6.Double (all)
- 7.Quad (all)
- 8.Quint (all)
- 9.Ultra (all)
- 10.Single-Quad (all)
- 11.Single-H/L (all)

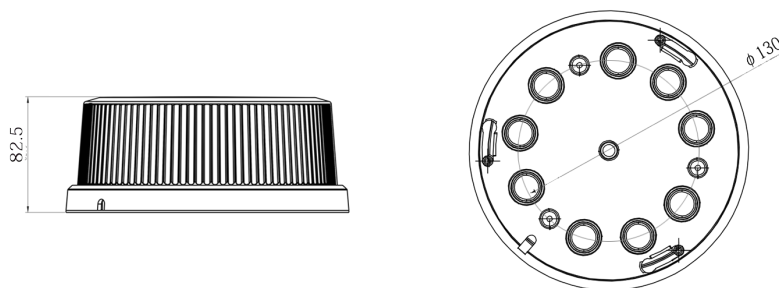

MOUNTING

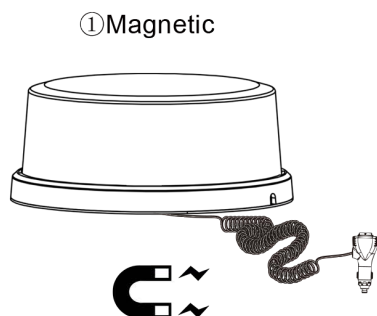



**Your Innovative and
Reliable Partner**

www.911signal.com



Would you like to extend
one more year of warranty?

911 Signal Technology Inc.

Add: Room 701-702, Hengwei Building, No.258, Tiangao Lane,
Shounan Subdistrict, Yinzhou Area, Ningbo City, Zhejiang, China.

Tel: +86-574-8901 7911 +86-400 6757 911

Fax: +86-574-8282 2560

E-mail: sales@911signal.com