



LUMIOPT X18

Flexible Installation Visor Light



911Signal Technology Inc.

www.911signal.com

B08ILX18X201 V1.0


USER GUIDE

1. Technical Specifications


ITEM	052301 BRW, 052301 AGW
Max Power	25W
Voltage	10.5-16.5V
Flash Pattern	14
IP Rating	IP67
Operating Temperature	-30°C to +70°C
Dimensions	220x26x30mm (Bezel-free) 266x76x35mm (With bezel)
Mount	3M Adhesive Bracket mount with screws
Warranty	5-year

2. Mounting

2.1 Bracket Mount

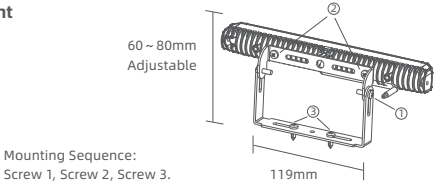


2.2 3M Adhesive

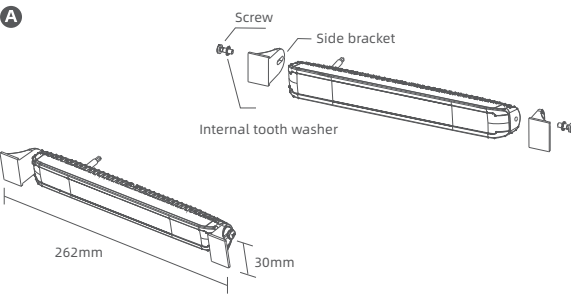


B

Mounting:

1. Place the ① lighthead into the ② visor and secure it with ③ screws.
2. Adjust to the desired angle, then sequentially insert the ④ bracket and ⑤ washer, and secure with ⑥ screws.
3. Install the ⑦ bumper strip and ⑧ top cover.
4. Peel off the ⑨ 3M adhesive, then proceed with the installation directly.

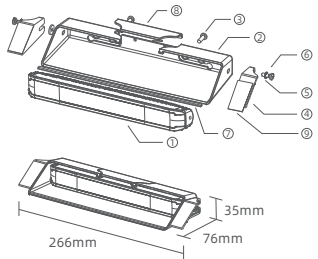

3. Function

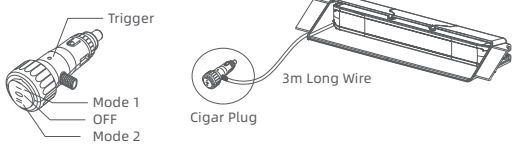

*Trigger key function

Long press for 5 seconds - Resets the function.
Mode 1 Reset: Red-blue dual flash (R65 Double);
Mode 2 Reset: Steady white.

Time	1s	2s	3s	4s
Prompt	💡 ×1	💡 ×2	💡 ×3	💡 ×4
Function	Flash Control	Color Control	Pattern Control	Alternating Control
Order	1. Steady	Color 1	All Flash	⬛ ⬜
	⋮	Color 2	Left-Right Flash	⬜ ⬛
	⋮	Color 3		⬜ ⬛
	⋮	Color 1&2		⬜ ⬛
	⋮	Color 1&3	/	/
	⋮	Color 2&3		
	14. Single-H/L	Color 1&2&3		

4. Flash Patterns

1	Steady	8	Single
2	Random	9	Double
3	SAE Single	10	Quad
4	ECE R65 Single	11	Quint
5	ECE R65 Double	12	Ultra
6	ECE R65 Triple	13	Single-Quad
7	ECE R65 Quint	14	Single-H/L