





FEATURES

- ◎ Lens made of transparent silicone material, base made of thermally conductive silicone material, lifetime warranty
- ◎ Configured with two types of COVER, ABS+PC hard and silicone soft materials
- ◎ Can be bent back up to 30° for installation on curved surfaces
- ◎ 3M tape installation and M3 screw installation, mounting hole spacing 120mm
- ◎ ECE R10, ECE R65, SAE J595, CA T13

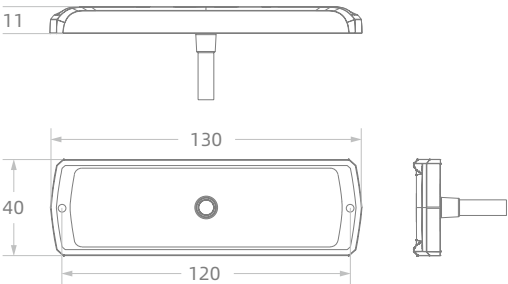


Install Cover

Hard Cover





















Check if the cover is securely in place.

Soft Cover



Press along the edges with your fingers, ensuring a tight and snug fit.

Code	TF-12 Warning and Working Light																	
Item	024545		024546				024541			024542								
Voltage	10-33V						10-16V											
Color																		
Max Power	18W						20W											
LED	12PCS		24PCS				24PCS			48PCS								
Flash Pattern	14																	
LENS	TIR																	
Functoon	Warning Light		Warning and Working Light															
IP Rating	IP67+IP69K																	
Operating Temperature	-30° C to +70° C																	
Certifications	ECE R10, ECE R65 XB2/XA2/XR2, SAE J595 class1, CA T13																	
Mounting	Screw Mount / 3M Tape Installation																	
Warranty	Lifetime Warranty																	

TF SERIES ITEM SPECIFICATION

0245	41	TBR
Configuration	45, 46: 10-33V 41, 42: 10-16V	
LED Color	Single: B, R, A, W Dual: TBR, TAB, TBW, TAR, TRW, TAW Four: TBRAW	

A: Amber
R: Red
B: Blue
W: White

911Signal Technology Inc.

Email: sales@911signal.com
Web: www.911signal.com

