











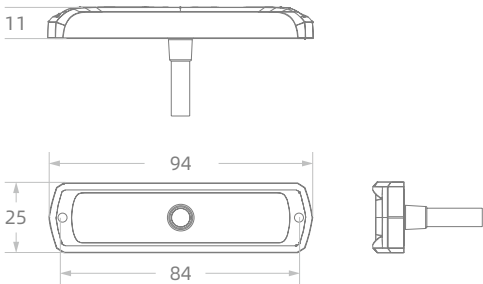


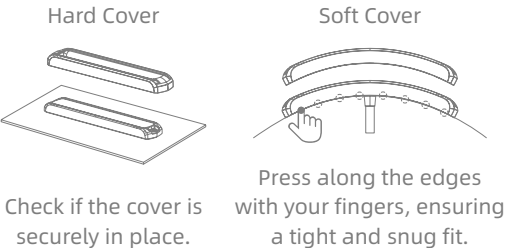







FEATURES

- Lens made of transparent silicone material, base made of thermally conductive silicone material, lifetime warranty
- Configured with two types of COVER, ABS+PC hard and silicone soft materials
- Can be bent back up to 30° for installation on curved surfaces
- 3M tape installation and M3 screw installation, mounting hole spacing 85mm
- ECE R10, ECE R65, SAE J595, CA T13



Install Cover



Code	TF-4 Warning and Working Light																
Item	024505		024506				024501			024502							
Voltage	10-33V						10.5-16.5V										
Color																	
Max Power	6W						8W										
LED	4PCS		8PCS				8PCS			16PCS							
Flash Pattern	14																
LENS	TIR																
Functoon	Warning Light		Warning and Working Light														
IP Rating	IP67+IP69K																
Operating Temperature	-30° C to +70° C																
Certifications	ECE R10, ECE R65 XB2/XA2/XR2, SAE J595 class1, CA T13																
Mounting	Screw Mount / 3M Tape Installation																
Warranty	Lifetime Warranty																

TF SERIES ITEM SPECIFICATION

0245

01

TBR

Configuration

05, 06: 10-33V
01, 02: 10-16V

LED Color

Single: B, R, A, W
Dual: TBR, TAB, TBW, TAR, TRW, TAW
Four: TBRAW

A: Amber
R: Red
B: Blue
W: White

