




FEATURES

- ◎ 180° high-brightness light coverage.
- ◎ Equipped with dual-color and quad-color, featuring 14 flash patterns.
- ◎ Four quick programming modes.
- ◎ Combination of working and warning light.
- ◎ Comes with three sets of adjustable angle aluminum alloy brackets, suitable for use on grilles, bumpers, and car hoods.
- ◎ Power and control lines feature 15cm long sheathed wire.
- ◎ Aluminum housing with spray-coated finish, PC lampshade UV-resistant.
- ◎ Dimensions: 220mm*26mm*30mm.
- ◎ IP67 rating, operating temperature range from -30° C to +70° C, maintaining stable operation.

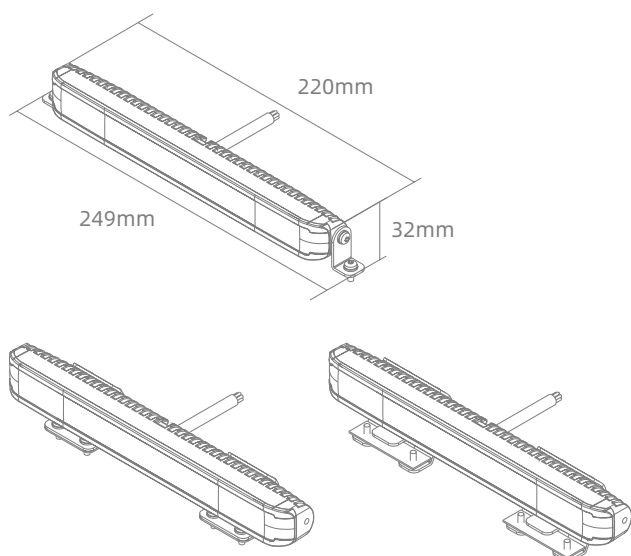

Code	2X9-Installation of 180° high-brightness flexible brackets	
Item	025201	
Color	Dual-Color	Quad-Color
LED color		
Voltage	10-33v	
Max power	25w	
LED	36pcs	72pcs
Flash patterns	14	
LENS	Lin	
Function	Working and warning light	
IP rating	IP67	
Operating temperature	-30° C to +70° C	
Mounting	Bracket mount	
Warranty	5-year	
Certification	SAE J595, CA T13, ECE R65, ECE R10	

2X9 SERIES ITEM SPECIFICATION

0252 — 01 — TAW

LED Color

Dual: TAW\TBR\TBW\TRW
Quad: TBRAW

A: Amber R: Red
B: Blue W: White

911Signal Technology Inc.

Email: sales@911signal.com
Web: www.911signal.com

