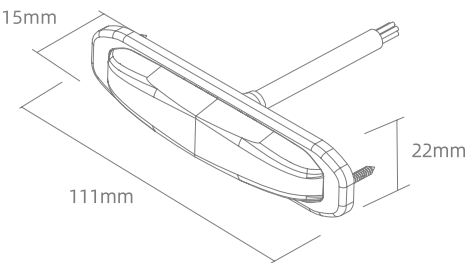








FEATURES

- ◎ Ultra-thin design with a thickness of only 15mm, suitable for installation on car bodies, bumpers, grilles, hoods, rearview mirrors, etc.
- ◎ Available in single color, dual color, quad color, and segmented color modes
- ◎ 14 flash patterns with synchronized alternating flash function
- ◎ Wide-angle illumination up to 120 degrees
- ◎ Includes warning and working light functions
- ◎ Fully encapsulated for moisture, vibration, and corrosion resistance
- ◎ Optional smoked lens
- ◎ Surface mount and bracket mount
- ◎ Quick programming with 4 modes
- ◎ IP67+IP69K, -30°C to +70°C , maintains stable operation
- ◎ Certified to ECE R10, ECE R65 Class 2, SAE J595 Class 1, CA T13
- ◎ 5-year warranty



Code	X6-PRO			
Item	025105	025101	025106	025102
Mode	Single Color	Dual Color		Quad Color
Color				
Voltage	DC 10-33V			
Max Power	9W			
LENS	FLARE			
LED	6	12	24	
Flash Patterns	14			
Function	Warning light	Working & warning light		
IP Rating	IP67 + IP69K			
Operating Temperature	-30℃ ~ +70℃			
Certification	ECE R10, ECE R65 Class2, SAE J595 Class1, CA T13			
Mounting	Surface Mount, Bracket Mount			
Warranty	5-year			

X6-PRO SERIES ITEM SPECIFICATION

0251	01	TBR
Configuration	LED Color	
Single Color: 05	B, R, A, W	A: Amber
Dual Color: 01, 06	TBR, TAB, TBW, TAR, TRW, TAW	R: Red
Quad Color: 02	TBRAW	B: Blue
		W: White

911Signal Technology Inc.

Email: sales@911signal.com  
Web: www.911signal.com

